

20mm Pedal Spacers

Part# 4030220

Used for added stance width

Designed to improve cycling stance width helping to align ankle, knee and hip. Only works with pedals that allow use of a pedal wrench. Does NOT work with pedals that are only installed with an allen key. Uses standard 9/16" pedal threads. Not for use with carbon fiber crank arms. Max rider weight - 275 lbs / 125 kg. Recommended torque: 304 in-lbf (34.3 N*m). Grease all threads prior to installation.


 MSRP **\$34.95**


Please know that there are some exceptions to when you can use these pedal spacers.

They work only with pedals that accept a pedal wrench for installation and removal. They do not work with pedals that only accept an allen key for installation and removal (like Look Keos or Shimano Dura Ace SPD-SL). Note some models within a brand may or may not work. For example: some Crank Brothers pedal models work and some do not. *Not compatible with Garmin Vector 3



Where **Hex Key Allen Wrench** is only installation method - 20mm Pedal Spacers are NOT compatible

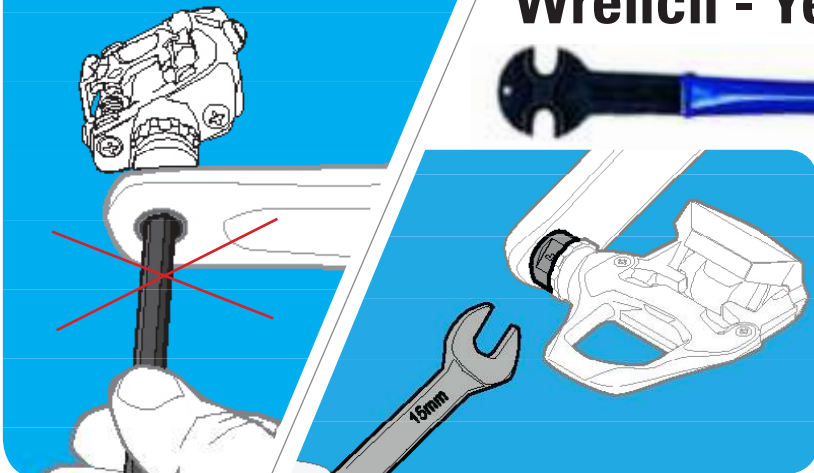


20mm PEDAL SPACERS only work if you can install with a Pedal Wrench. Pedals with only allen key installation will not work with Pedal Spacers.
- Check your pedal brand and model to ensure compatibility.

Wrench - Yes



Wrench flat spots on pedal spindle

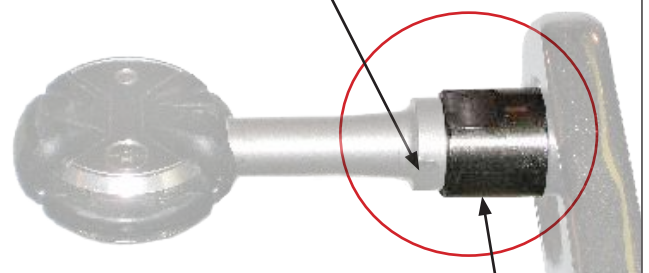

Pedal Spacer uses 18mm wrench for installation